

MVME2100 Series

VMEbus Processor Modules

DATASHEET

KEY FEATURES

MPC8240 32-bit microprocessor
L1 cache – 6KB/16KB MPC60x class

32MB of on-board SDRAM with optional ECC protection

Two 32-pin PLCC/CLCC sockets for flash memory; up to 1MB capacity for on-board firmware or user-specified requirements

4MB on-board flash memory for user-specified requirements

One IEEE P1386.1 compliant 32-bit PMC slot with front-panel and P2 I/O

Three 32-bit PC•MIP expansion slots, compatible with the VITA 29 standard

32-bit PCI expansion mezzanine connector


Ethernet transceiver interface with 32-bit PCI local bus DMA, 10/100Mbps with auto-negotiate speed select

8K x 8 NVRAM and time-of-day clock with replaceable battery backup

Four 32-bit timers, one 16-bit timer, one watchdog timer


The MVME2100 series of VME processor modules is a family of highly modular single-board computers for VME applications. At the heart of the MVME2100 is the MPC8240, a highly integrated PowerPC® architecture microprocessor with an MPC60x class core, an advanced memory controller, and a peripheral component interconnect (PCI) interface.

With the MPC8240 and a combination of a PCI mezzanine card (PMC) and PC•MIP mezzanine slots, the MVME2100 provides customers with a high performance building block for I/O expansion in industrial automation, telecommunications, medical, scientific, or imaging applications.

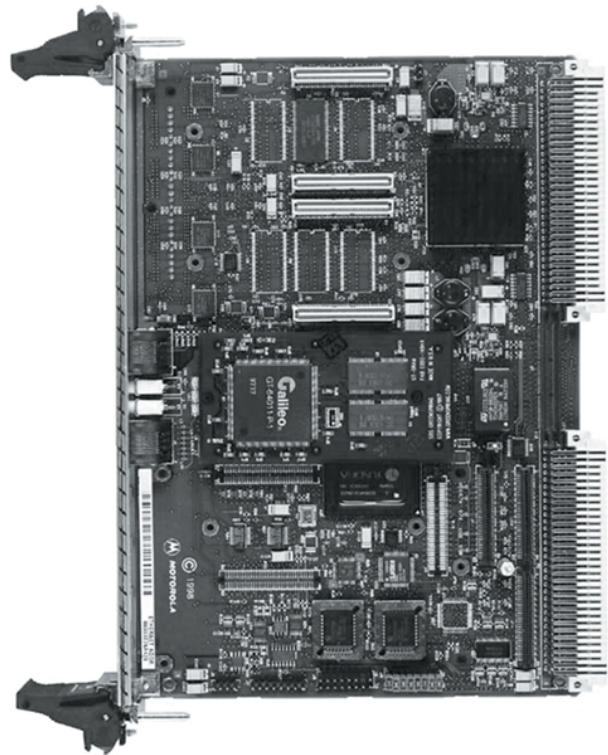

See back page for details

The Motorola MVME2100 series of modular single-board computers provide high-performance expansion I/O for industrial automation, telecommunications, medical, scientific, or imaging applications.

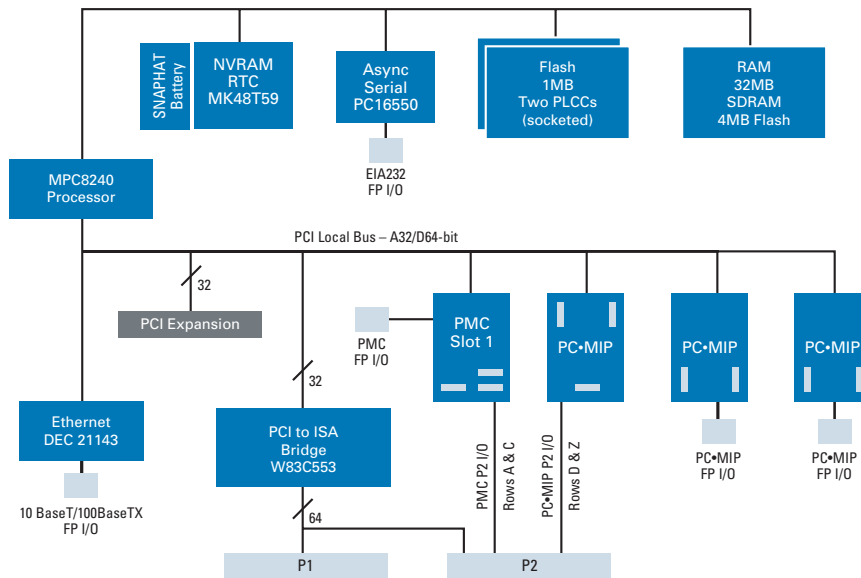

OVERVIEW

PC•MIP EXPANSION

To maximize I/O expansion flexibility, the MVME2100 features a combination of PC•MIP and PMC slots. PC•MIP is a mezzanine standard (VITA 29) that combines the benefits of the small form factor of IndustryPack with the performance of PCI. The MVME2100 provides one Type I PC•MIP slot with rear I/O via the P2 connector and two Type II PC•MIP slots with front panel I/O. The two Type II slots can accept either one double-wide or two single-wide PC•MIP cards.

PMC EXPANSION

In addition to three PC•MIP slots, the MVME2100 provides one IEEE P1386.1 compliant PMC slot that supports both front-panel and P2 I/O, and a mating connector to a PMC expansion mezzanine for applications requiring more real estate. In addition to providing high-performance expansion I/O, the mezzanine slots form a common architecture for future generations of products. Changing I/O requirements can be satisfied by simply replacing the PMC or PC•MIP mezzanines while reusing the same base platform, reducing the long-term cost of ownership.

VME64 EXTENSION CONNECTORS

To maximize the capabilities of the MVME2100, 5-row, 160-pin DIN connectors replace the 3-row, 96-pin connectors historically used on VME for P1 and P2. Two rows, Z and D, have been added to the VME P1/J1 and P2/J2 connectors providing a user with additional I/O. The VME64 extension connector is 100 percent backward compatible with existing VME card systems.

FRONT PANEL HANDLE OPTIONS

Part of the VME64x specification defines the use of new injector/extractor handles as defined by IEEE 1101.10. A primary benefit of this handle type is easier insertion and ejection of the VME board into and out of a backplane. Motorola offers versions of our products that are compatible with this standard. In addition, we provide versions with the small Scanbe handles traditionally provided on VME. Consult your sales representative for part numbers and ordering details.

SPECIFICATIONS

PROCESSOR

Microprocessor: MPC8240
Processor Core: MPC60x class
Core Frequency: 200 MHz
External Bus Frequency: 66.67 MHz (at 200 MHz)
On-Chip Cache (I/D): 16KB/16KB

MEMORY

Main Memory: Synchronous dynamic RAM at 66 MHz or 83 MHz
Capacity: 32MB
EEPROM/Flash: On-board, programmable
Capacity: 1MB via two 32-pin PLCC/CLCC sockets; 4MB surface mount
Read Access (4/8MB port): 35 clocks at 66 MHz or 36 clocks at 83 MHz (32-byte burst)
Read Access (1MB port): 236 clocks at 66 MHz or 268 clocks at 83 MHz (32-byte burst)
NVRAM: 8KB; 4KB available for users
Cell Storage Life: 50 years at 55° C
Cell Capacity Life: 10 years at 100% duty cycle
Removable Battery: Yes

VMEBUS ANSI/VITA 1-1994 VME64 (IEEE STD 1014)

DTB Master: A16–A32; D08–D64, BLT
DTB Slave: A24–A32; D08–D64, BLT, UAT
Arbiter: RR/PRI
Interrupt Handler/Generator: IRQ 1–7/Any one of seven IRQs
System Controller: Yes, jumperable or auto detect
Location Monitor: Two, LMA32

ETHERNET INTERFACE

Controller: DEC 21143
PCI Local bus DMA: Yes
Connector: 10/100BaseT routed to front panel, RJ-45

ASYNCHRONOUS SERIAL PORT

Controller: PC16550
Connector: Routed to front panel, RJ-45

COUNTERS/TIMERS

TOD Clock Device: MK48T59; 8KB NVRAM
Real-Time Timers/Counters: Four, 16-bit programmable
Watchdog Timer: Time-out generates reset

MISCELLANEOUS

Front panel: Reset and Abort switches; three LEDs for Fail, Activity, SCON

BOARD SIZE

Height: 233.4 mm (9.2 in.)
Depth: 160.0 mm (6.3 in.)
Front Panel Height: 261.8 mm (10.3 in.)
Width: 19.8 mm (0.8 in.)
Max. Component Height: 14.8 mm (0.58 in.)

POWER REQUIREMENTS

+5V ± 5%

MVME2100 w/MPC8240
@ 200 MHz: 12.5W @ 4.875 – 5.25 V
Note: +12 V and –12 V power is not used on the board but is available to the PMC and PC•MIP sites.

IEEE P1386.1 PCI MEZZANINE CARD SLOT

Address/Data: A32/D32, PMC PN1, PN2, PN4 connectors
PCI Bus Clock: 33 MHz
Signaling: 5 V
Power: +3.3 V, +5 V, ±12 V, 7.5 watts maximum per PMC slot
Physical Dimensions: 74 mm x 149 mm
Module Types: One single-wide, front-panel I/O or P2 I/O

PC•MIP MEZZANINE CARD SLOTS

Address/Data: A32/D32
PCI Bus Clock: 33 MHz
Signaling: 3.3 V (+5 V tolerant)
Power: +3.3 V, +5 V, ±12 V, the PC•MIP standard does not limit maximum power per slot
Physical Dimensions: 47 mm x 90 mm
Module Types: One Type I with P2 I/O via Rows D and Z, Two Type II with front-panel I/O, support for either one double-wide or two single-wide Type II PC•MIP boards
Note: User I/O using connector P3 of the Type II PC•MIP boards is not supported.

PCI EXPANSION CONNECTOR

Address/Data: A32/D32
PCI Bus Clock: 33 MHz
Signaling: 5V
Connector: 114-pin connector located on the planar of the MVME2100

ENVIRONMENTAL

	Operating	Non-operating
Temperature:	0° C to +55° C, forced air cooling	–40° C to +85° C
Humidity (NC):	5% to 90%	5% to 90%
Vibration:	2 Gs RMS, 20–2000 Hz random	6 Gs RMS, 20–2000 Hz random

ELECTROMAGNETIC COMPATIBILITY (EMC)

Intended for use in systems meeting the following regulations:

U.S.: FCC Part 15, Subpart B, Class A (non-residential)

Canada: ICES-003, Class A (non-residential)

This product was tested in a representative system to the following standards:

CE Mark per European EMC Directive 89/336/EEC with Amendments; Emissions: EN55022 Class B; Immunity: EN55024

SAFETY

All printed wiring boards (PWBs) are manufactured with a flammability rating of 94V-0 by UL recognized manufacturers.

DEMONSTRATED MTBF

(based on a sample of eight boards in accelerated stress environment)

Mean: 190,509 hours

95% Confidence: 107,681 hours

SOFTWARE

The MVME2100 is supported by a variety of operating systems, including a complete range of real-time operating systems and kernels.

ORDERING INFORMATION

Part Number	Description
MVME2101-1	200 MHz MPC8240, 32MB SDRAM, 5MB flash, original VME Scanbe front panel and handles
MVME2101-3	200 MHz MPC8240, 32MB SDRAM, 5MB flash, IEEE 1101 compatible front panel with injector/ejector handles
MVME2102-1	200 MHZ 8240, 64MB DRAM, Scanbe FP
Related Products	
PMCSPAN15E-001	PMCSPAN-001 with original VME Scanbe front panel and handles 5E
PMCSPAN15E-010	PMCSPAN-010 with original VME Scanbe front panel and handles 5E
Documentation	
V2100A/IH	MVME2100 Installation and Use Manual
V2100A/PG	MVME2100 Programmer's Reference Guide
PMCSpanA/IH	PMCSpan Installation Guide
PPCBUGA1/UM	PPCBUG Firmware User's Manual, Part 1 of 2
PPCBUGA2/UM	PPCBUG Firmware User's Manual, Part 2 of 2
PPCDIAA/UM	Firmware Diagnostics Manual
Documentation is available for online viewing and ordering at www.motorola.com/computer/literature	



Future RoHS Status

This product will continue to be offered as a 0/6 RoHS compliant product. Motorola does not intend to redesign this product for RoHS compliance. This product will only be shipped to those regions which can receive this level of compliance. Please see other VME offerings that will have the required level of compliance for your region and application.

SOLUTION SERVICES

Motorola provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh. And solution extras include enhanced warranty and repairs.

Sales Offices

Tempe, AZ U.S.A. 1 800 759 1107 or +1 602 438 5720	Tel Aviv, Israel +972 3 568 4385
Paris, France +33 1 69 35 25 88	Shanghai, China +86 215292 5693
Munich, Germany +49 89 608 14-0	Tokyo, Japan +81 3 5424 3101
Loughborough, UK +44 1509 634300	Hong Kong, China +852 2966 3209

This document identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Motorola may sell products. A prospective buyer should exercise its own independent judgment to confirm the suitability of the products for particular applications. Motorola reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Motorola's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.



www.motorola.com/computing

MOTOROLA and the Stylized M Logo are registered in the U.S. Patent and Trademark Office. PowerPC is a trademark of IBM Corp. and used under license. All other product or service names are the property of their respective owners.
© Motorola, Inc. 2005